





HA-RB-640 Portable Sealing Machine

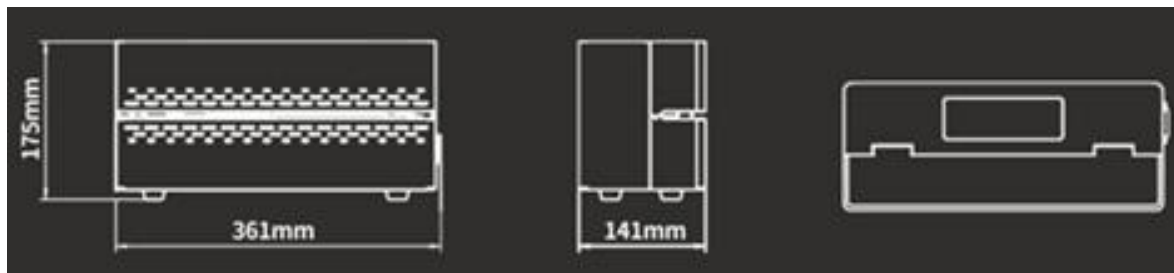

1. Main Parameters

Model	HA-RB-640
Voltage (V/Hz)	240/60
Motor Power (W)	20
Heating Power (W)	200*2
Temperature Range (°C)	0-300
Shipping Dimensions (L*W*H, mm)	420*200*230
Shipping Weight (KG)	5.5

2. Details of the Machine

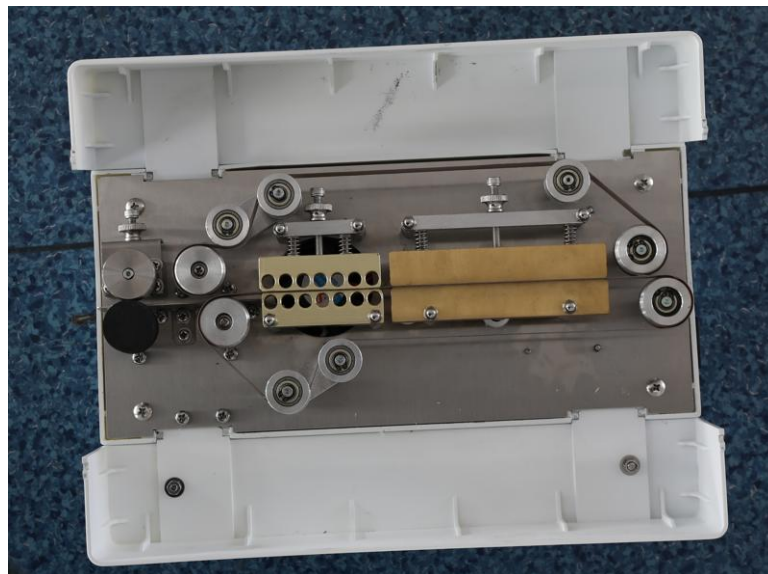

Portable Continuous Band Sealer

- ✓ Auto-shut off function to ensure safety
- ✓ Compact and portable
- ✓ Available in 5 colors



Parameter

- Motor power: 28W / Heating power: 200W*2
- Voltage: 220V/50Hz(1PH) Sealing width: 10mm
- Option: 110V/60Hz(1PH)-240V/50Hz(1PH)
- Distance from sealing center to bag mouth: 38mm
- Conveyor speed: 7m/min Net weight: 5kg


Shipping

- Shipping dimensions: 420×225×230mm Weight: 5.5kg

Features



Automatic shutdown below 50°C for safety

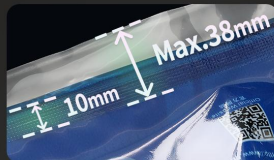


Max. distance from sealing center to bag mouth: 38mm

Temperature

- Temperature control range (0-300°C)
- LDPE (30-160um) suggest 105-150°C
- MDPE (40-120um) suggest 115-120°C
- HDPE (40-90um) suggest 125-150°C
- PP (40-60um) suggest 135-160°C

Optional conveyer

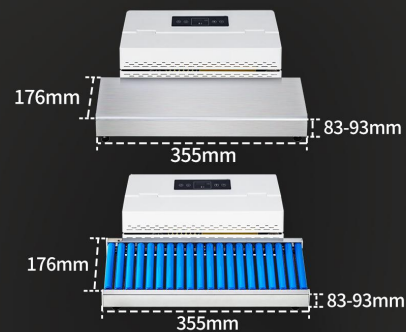

Available in 5 colors



● Azure



● Honey yellow



○ Jet black



● Jade green



● Plum purple