

J PRISMA
PARMA ITALY



**checkweigher
35T3**





discover
all the details
on our web-site!



Technical Specifications

Weighing range	up to 1500 g
Display division	from 0,1 g
Throughput	up to 100 ppm
Accuracy*	from ± 0,1 g
Pneumatic supply	0,6 Mpa
Air consumption (for ejection)	1 NL
Power supply	380V three phase 50/60Hz with ground and neutral
Power consumption	700 W
Mirror finishing of metal parts	Stainless Steel IP54
Climatic environment	from 5°C up to +40°C non-condensing (closed)

*depending on the weight, dimensions and type of product

Electronics

T3



- Digital electronics with PC Mainboard mini-ITX
- 10,4" TFT color display with touch screen panel
- Windows 10 IoT operating system
- 200 storabile product programs

D3





- Digital electronics with alphanumerical graphic display
- 100 storabile product programs

Equipment

- | | |
|--|--|
| • Electronic self-calibration device | • Separated electronic equipment |
| • Conformity with standards ISO - FDA - HACCP - GMP - CE | • Mobile average function |
| • 3 levels password access protection | • 2 RS232 serial ports |
| • Wind-prevention tunnel | • Production data management in conformity with the standards in force |

Optional

- | | |
|-----------------------------|--|
| • Ejection systems | • USB interface |
| • Reject management systems | • Ethernet interface for Industry 4.0 compliance |
| • Alarms notification | • Products programs memory expansion |
| • 24-columns panel printer | • Feed-back function |
| | • FAT/SAT, IQ/OQ validations, CFR21 part 11 |

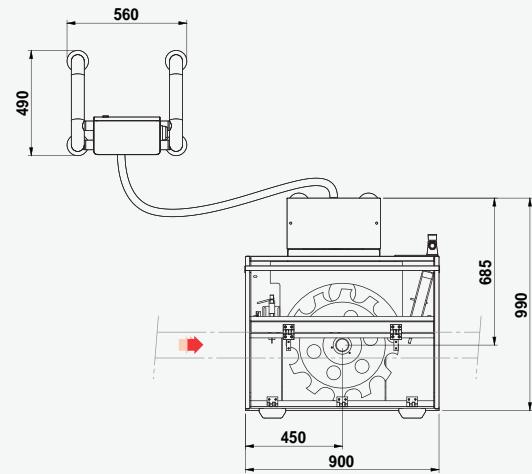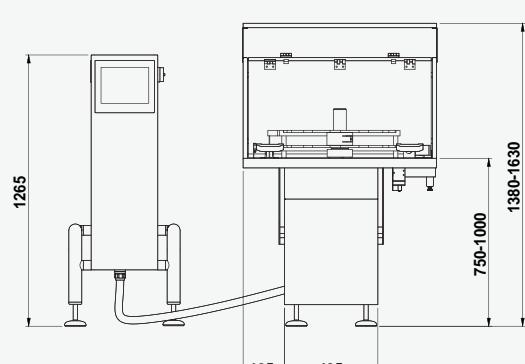

The manufacturer reserves the right to change the product specifications without notice. The image and the drawing are indicative of one of the possible configurations of the machine.